


V Grooves

V-grooves are available on all Van der Graaf drum motors. The v-groove is machined into the shell for optimal tracking and single or multiple v-groove locations are available. If lagging is required then a 1/8" maximum thickness is available to minimize chance of v-guide climb out.

Please consult Van der Graaf for custom groove profiles.

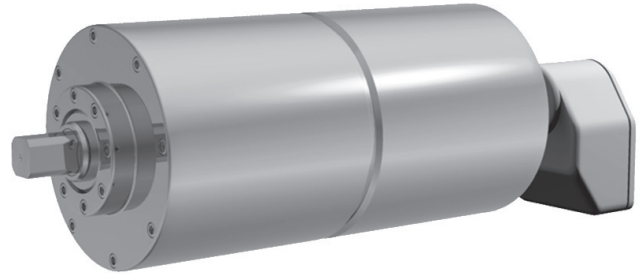

V-GROOVE	X		Y		Z		Ø
	INCH	MM	INCH	MM	INCH	MM	
A	0.625	15.9	0.375	9.5	0.375	9.5	-
B	0.75	19.1	0.375	9.5	0.5	12.7	-
C	1.125	28.6	0.75	19.1	0.75	19.1	-
K13	0.593	15.06	0.395	10.03	0.384	9.75	-
O	0.409	10.4	-	-	0.27	6.9	44°
3L	0.375	9.5	0.219	5.6	0.219	5.6	-

